

KITCHEN SINK FAUCET


K-647

ALSO K-649

ADA

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- Flexible connections for easy installation
- 2.2 gallons (8.3 L) per minute flow rate
- Asymmetrical design
- Integral pulldown sprayhead with retractable hose
- Compact three-function sprayhead with spray, aerated flow and pause functions
- Coordinating primary and secondary/prep sink faucets available
- ADA compliant remote lever handle

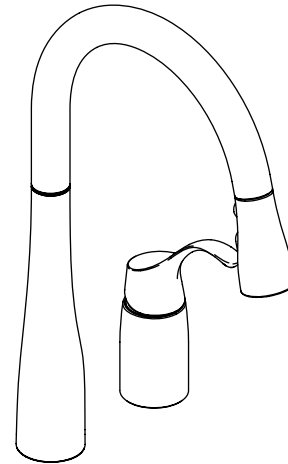

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Energy Policy Act of 1992
- NSF 61
- IAPMO/cUPC
- ADA

Colors/Finishes

- CP: Polished Chrome
- VS: Stainless Steel
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	Description	Colors/Finishes		
K-647	9" (22.9 cm) spout reach pulldown faucet for primary kitchen sinks (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> VS	<input type="checkbox"/> Other ____
K-649	8" (20.3 cm) spout reach pulldown faucet for secondary/prep sinks	<input type="checkbox"/> CP	<input type="checkbox"/> VS	<input type="checkbox"/> Other ____

Product Specification


Kitchen sink faucet with asymmetrical design shall be of metal construction. The valve shall be a one-piece, self-contained ceramic disc valve, allowing volume and temperature control. The valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a high-temperature limit stop for added safety, ADA compliant remote lever handle, and integral pulldown sprayhead with retractable hose and aerated flow and pause functions. Product shall include flexible connections for easy installation. Product shall have a 2.2 gallon (8.3 L) per minute flow rate. Kitchen faucet shall be Kohler Model K-_____ - _____.

SIMPLICE™

Installation Notes

Install this product according to the installation guide.

Model	A	B	C
K-647	9" (22.9 cm)	8-7/8" (22.5 cm)	16-1/8" (41 cm)
K-649	8" (20.3 cm)	7-15/16" (20.2 cm)	14-3/4" (37.5 cm)

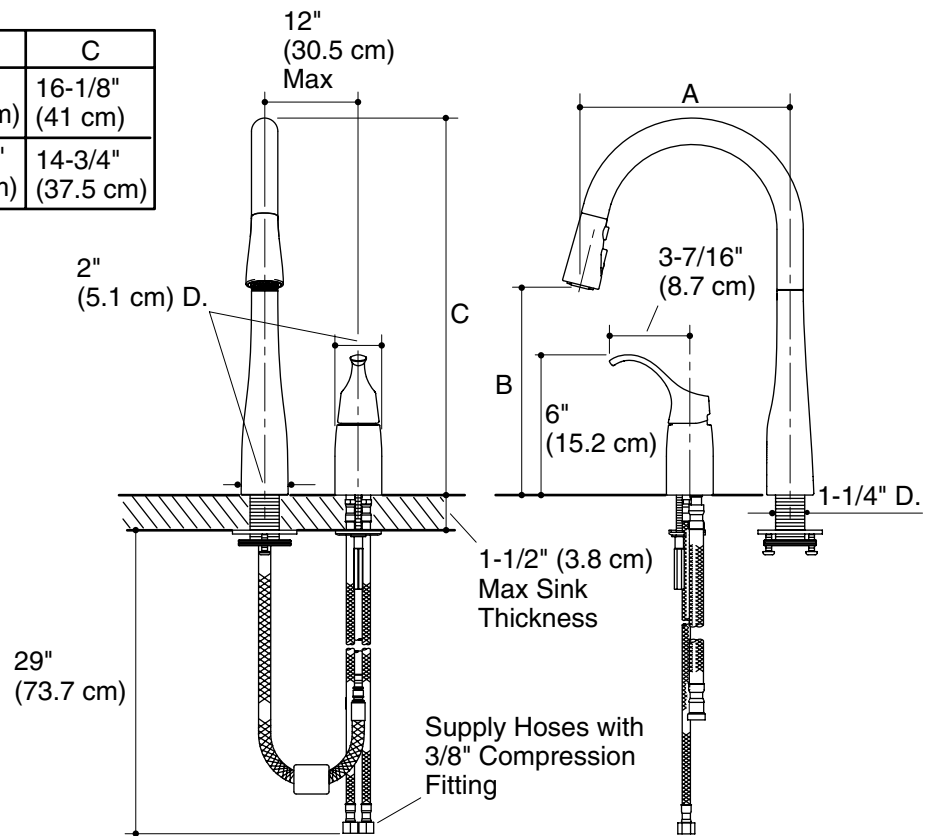

Product Diagram