

ANTIQUE_{TM}

Features

- Brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- 2.2 gallons (8.3 L) per minute maximum flow rate
- Handspray
- Flexible connections for easy installation
- For 8" (20.3 cm) centers
- · Available with six-prong or lever handles
- · Lever handles are ADA compliant
- 8-5/8" (21.9 cm) swing spout


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1014
- NSF 61
- Energy Policy Act of 1992
- ADA

KITCHEN SINK FAUCET K-158

ADA



Colors/Finishes

- · CP: Polished Chrome
- BN: Brushed Nickel
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- BN: Brushed Nickel
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	I	Description						ADA
K-158	-3	Kitchen sink faucet with six-prong handles	☐ CP	□ BN	□ Other			
K-158	-4	Kitchen sink faucet with lever handles				□ CP	□ BN	☐ Other

Product Specification


The two-handle kitchen sink faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall feature quarter-turn washerless ceramic disc valves, assuring positive handle stop positioning. Faucet shall have a flow rate of 2.2 gallons (8.3 L) per minute. Faucet shall feature 8" (20.3 cm) centers, 8-5/8" (21.9 cm) swing spout, six-prong handles (-3) or lever handles (-4), handspray, and flexible connections for easy installation. Faucet shall feature ADA compliant lever handles. Faucet shall be Kohler Model K-158-____-

ANTIQUE_{TM}

Optional Ac				
K-9637	Small lever inserts, pair	□ CP	□ BN	
K-9657	Small lever inserts, pair	☐ Other		
77619	Deep roughing-in kit for 2-handle (only) kitchen faucets	□ NA	□NA	
1011402	Sidespray deep roughing-in kit	□ NA	□ NA	
40003	Wrench for long-stemmed ceramic valve bodies	□ NA	□ NA	

Installation Notes

Install this faucet following the installation instructions provided.

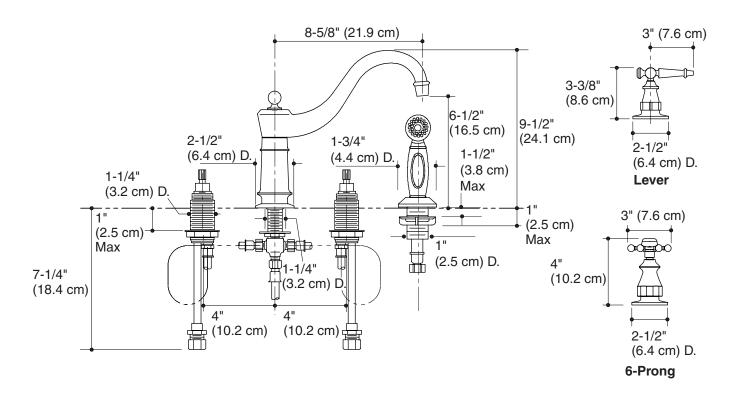

Product Diagram

