

ESSEX TM

Features

- Brass construction
- · Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- 2.5 gpm (9.5 lpm)
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Wristblade handles
- · Available with or without handspray
- Optional escutcheon plate is available for three-hole installations
- 9-1/4" (23.5 cm) gooseneck swing spout

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- ADA

KITCHEN SINK FAUCET K-8763 ALSO K-8762

ADA



Colors/Finishes

• CP: Polished Chrome

BN: Brushed Nickel

Specified Model

| Model | Description | Colors/Finishes | | | |
|----------------------|-----------------------------------------------------------------|-----------------|------|------|---------|
| K-8763 | Kitchen sink faucet with accent handspray (shown) | □ CP | □ BN | | ☐ Other |
| K-8763-BX | Kitchen sink faucet with classic handspray | | | □ BX | |
| K-8762 | Kitchen sink faucet less handspray | □ CP | □ BN | | Other |
| Optional Accessories | | | | | |
| K-14511 | 10-1/2" (26.7 cm) escutcheon plate for three-hole installations | | | CP | □BN |


Product Specification

The two-handle kitchen sink faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall feature quarter-turn washerless ceramic disc valves, assuring positive handle stop positioning. Faucet shall include 9-1/4" (23.5 cm) gooseneck swing spout, and wristblade handles. Faucet shall be available with or without handspray. Faucet shall be available with optional escutcheon plate for three-hole installations. Faucet shall have a flow rate of 2.5 gpm (9.5 lpm) with lower flow aerator options available (refer to the Kohler Price Book). Faucet shall be Kohler Model K- - or K-8763-BX.

ESSEX TM

Installation Notes

Install this product according to the installation guide.

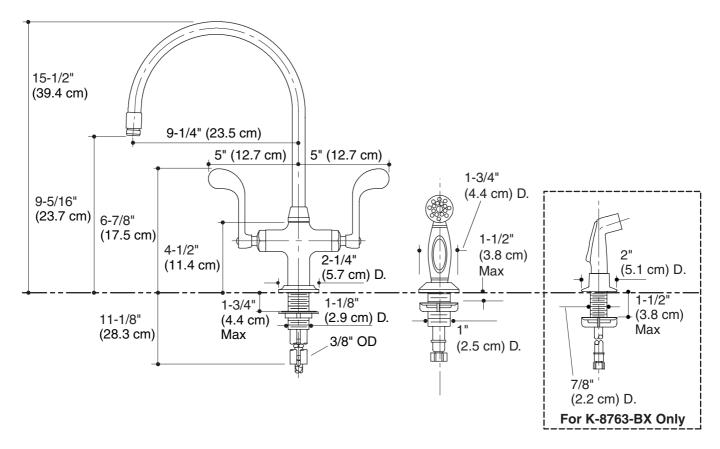

Product Diagram

