

**KITCHEN SINK FAUCET  
K-12171**

**ALSO K-12172, K-12175, K-12176**

**ADA**


**Features**

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- 9" (22.9 cm) swing spout reach
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Available with or without handspray
- 2.2 gallons (8.3 L) per minute maximum flow rate

**Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992
- ADA
- CSA International

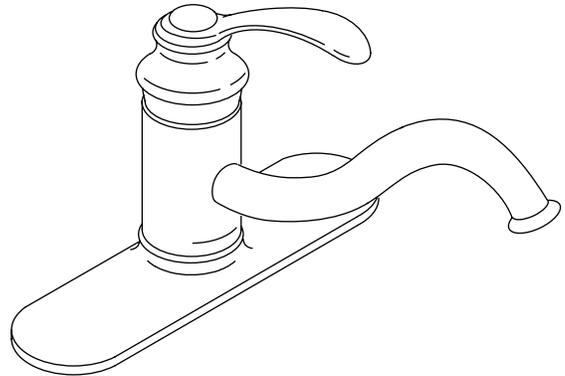

**Colors/Finishes**

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

**Accessories**

- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

**Specified Model**

Model	Description	Colors/Finishes		
K-12171	With 10" (25.4 cm) escutcheon plate; less handspray	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other ____
K-12172	With 10" (25.4 cm) escutcheon plate; with handspray	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other ____
K-12175	With single-hole escutcheon ring; less handspray	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other ____
K-12176	With single-hole escutcheon ring; with handspray	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other ____
<b>Optional Accessories</b>				
K-12001	Plug Button	<input type="checkbox"/> Other ____		
1030920	Sidespray deep roughing-in kit	<input type="checkbox"/> NA		


**Product Specification**

Single-control kitchen sink faucet shall be of metal construction. The valve shall be a one-piece, self-contained ceramic disc valve, and allows both volume and temperature control. The valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting, and includes a high-temperature limit stop. Faucet shall have a 2.2 gallons (8.3 L) per minute flow rate. Product shall have lower flow aerator options. Product shall include 9" (22.9 cm) swing spout and lever handle. Product shall be available with single-hole escutcheon ring or 10" (25.4 cm) escutcheon plate. Product shall be available with or without a handspray. Faucet shall be Kohler Model K-\_\_\_\_-\_\_\_\_.

# FAIRFAX®

## Installation Notes

Install this faucet following the installation instructions provided.

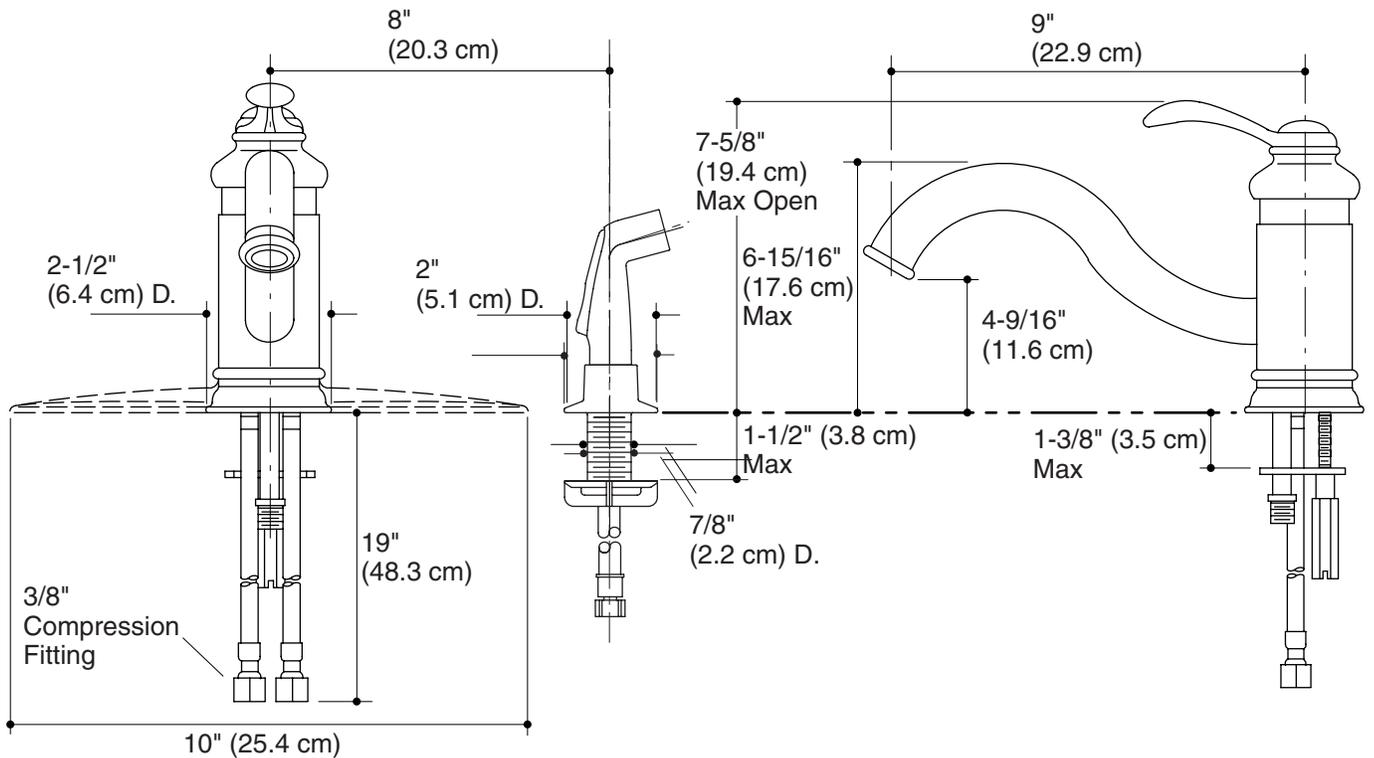

## Product Diagram